


Acoustic Partition Roll (APR)

Typical applications: Internal walls & floors and drylining systems

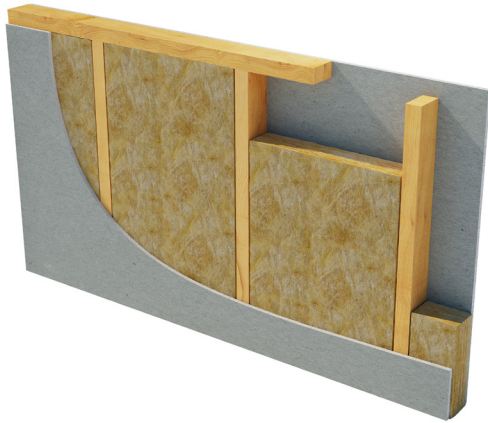

Description

Superglass Acoustic Partition Roll (APR) is a lightweight, non-combustible glass mineral wool insulation roll. The flexible roll is supplied at 1200mm and 2x600mm widths to allow easy installation between common stud/joist spacings and minimum on-site cutting and waste.

Application

Superglass Acoustic Partition Roll (APR) is designed to provide thermal and acoustic insulation for the following applications:

- Internal walls and floors
- Separating walls and floors
- Timber and metal stud partitions
- Drylining system



BRE Green Guide Rating

Acoustic Partition Roll (APR) has a generic BRE Green Guide Rating of A+.



Fire Performance

Acoustic Partition Roll (APR) has a fire classification of A1 (the highest possible rating) when tested to BS EN 13501-1 Reaction to Fire.



Acoustic Insulation

Acoustic Partition Roll (APR) provides excellent sound absorption performance.



Recycled Content

Acoustic Partition Roll (APR) is manufactured from up to 84% recycled glass.



Easy & Quick To Install

Friction fits between studs and joists.



Acoustic Partition Roll (APR) | Characteristics

Product dimensions and information					
Thickness (mm)	Length (m)	Width (mm)	Pack Area (m ²)	Packs per pallet	Code
25	22.50	1200	27.00	24	5525*
25	22.50	2x600	27.00	24	5526
50	13.00	1200	15.60	24	5551*
50	13.00	2x600	15.60	24	5552

*Non-Standard Products

Fire Performance

All Superglass products are deemed non-combustible and have a fire classification of A1 (the highest possible rating) when tested to BS EN 13501-1 Reaction to Fire.

Environment

- Manufactured in accordance with ISO 14001 - Environmental Management Systems (EMS).
- Zero Ozone Depletion Potential (ODP) & zero Global Warming Potential (GWP).
- Generic BRE Green Guide Rating of A+.
- A copy of the Environmental Product Declaration (EPD) can be downloaded from the Superglass website.

Recycled Content

All Superglass products are manufactured from up to 84% recycled glass which would otherwise go to landfill.

Standards

Manufactured in accordance with:

- BS EN 13162 Thermal insulation products for buildings - Factory made mineral wool (MW) products.
- BS EN 13172 Thermal insulation products - Evaluation of conformity.

Quality

All Superglass products are manufactured in accordance with BS EN ISO 9001 - Quality Management Systems (QMS).

Durability

All Superglass products are non-hygroscopic, will not rot, degrade or sustain vermin and will not encourage the growth of mould, bacteria or fungi.

Vapour Resistance

All Superglass products offer negligible vapour resistance allowing vapour to pass freely through the insulation.

Handling & Storage

All Superglass products are easy to handle, cut and install. The products are supplied compression packed in polythene to provide short term protection only. For long term protection, the product must be stored indoors, or under a waterproof covering and off the ground to protect from weather damage. The products should not be left permanently exposed to the elements.

Certification

- UKCA certified to BS EN 13162:2012+A1:2015.
- A copy of the Acoustic Partition Roll (APR) Declaration of Performance (DoP) ref: UKCA0009 (25mm) and UKCA0012 (50mm) can be downloaded from the Superglass website.

Associated Products

Multi Acoustic Roll

Building Information Modelling (BIM)

BIM objects for this product can be downloaded from www.bimstore.co.uk or www.superglass.co.uk



Superglass Insulation Limited. Thistle Industrial Estate, Kerse Road, Stirling, Scotland FK7 7QQ

Technical

Hotline: **0808 1645 134**

Email: technical-uk@tn-i.com


Customer Service

Tel: **01786 451170**

Email: customerservice-uk@tn-i.com

Social

 www.twitter.com/TNi_western

 www.linkedin.com/company/tninternational/

All rights are reserved, including those of photomechanical reproduction and storage in electronic media. Commercial use of the processes and work activities presented in this document is not permitted. Extreme caution was observed when putting together the information, texts and illustrations in this document. Nevertheless, errors cannot quite be ruled out. The publisher and editors cannot assume legal responsibility or any liability whatever for incorrect information and the consequences thereof. The publisher and editors will be grateful for improvement suggestions and details of errors pointed out.

