


## **EJOT** Self-tapping Concrete Anchor

**BS-R 6.3 x L**

- For - Mechanical fixing of insulation, Sandwich Panels, Metal Profiles  
Into - Concrete, concrete block work and brick

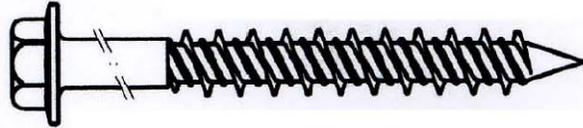

### **Features**

- Can be used with metal washers where fire protection is required
- Twin threads to reduce installation torque
- Wide range of lengths from 35 – 280mm
- Casehardened carbon steel
- Zinc plated and Climadur coated for corrosion protection

### **Application Detail**

- Pilot Hole diameter: 5mm
- Fastener Embedment: 30 – 40 mm
- Pilot Hole depth: 10mm deeper than embedment
- Drive: 8mm Hex Head

### **Expected Pull-out Value**

In the region of 5kN from concrete, depending upon grade and condition of substrate.

**We recommend confirmation by on-site testing.**

For Further Information Please Contact:

**EJOT<sup>®</sup>** *The quality  
connection*

EJOT U.K. Limited • Hurricane Close • Sherburn Enterprise Park • Sherburn-in-Elmet, Leeds. LS25 6PB  
Tel: 01977 887040 • Fax: 01977 887041 • Internet: [www.ejot.co.uk](http://www.ejot.co.uk) • e-mail: [info@ejot.co.uk](mailto:info@ejot.co.uk)

03.08.2011