


# EJOT Super-SAPHIR® Self-Drilling JF3-STX-2-4.8x25



## Ultimate Fastener Tensile Strength



Fastener Dia	kN
4.8 x 25	8.0


## Material Specification

### Fastener.


High quality Stainless steel grade 304 St/St, ISO group A2, Din Werkstoff 1.4301.

### Drill Point

High quality grade case hardened carbon steel.

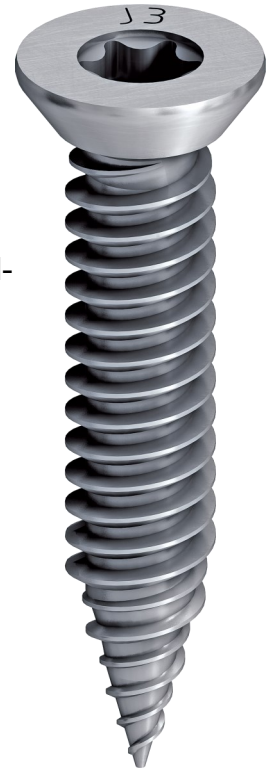

## Ultimate Fastener Shear Strength




Fastener Dia	kN
4.8 x 25	6.0

Torx 20 recess



## Ultimate Pullout Load kN



Fastener Dia	Nominal Steel Thickness (mm)	Nominal Steel Thickness (mm)	OSB	Plywood
	0.5	0.7	15mm	18mm
4.8 x 25	0.86kN	1.3kN	1.0kN	1.2 kN

Figures above are based on results obtained from tests carried out in our Applitec lab in accordance with equipment conforming to BS 5427 on a random sample of fasteners manufactured to EJOT tolerances. Information supplied should form part of a general guide and should performance data for a specific application be required please do not hesitate to contact us.

EJOT UK Limited Sherburn-in-Elmet, Leeds LS25 6PB.  
Tel: 01977 687040 Fax: 01977 687041  
www.ejot.co.uk info@ejot.co.uk

**EJOT** The Quality Connection